

GOLEM




An optimal means for the transport of patients with a possibility of X-raying directly on the table. High-quality travel wheels Ø 150 mm with two central brakes; leading wheels for straight direction. Two-part working surface of 630 × 1965 mm, back segment adjusted manually using by gas spring, from 0° to +75°. Outside dimensions (clearance profile) 760 × 2070 mm.

X-ray translucent surface in all length; a compartment to locate the cassette included. The C-arm can be used with the exception of the central part.

Standard equipment: comfortable fixed mattress, safety bumper profile on the frame periphery, safety bumper wheels in corners, hinged sides to prevent the patient from falling off, hinged operating grips in the front parts, removable infusion stand, oxygen cylinder holder, storage basket.

Carrying capacity 150 kg, weight 50/90 kg.

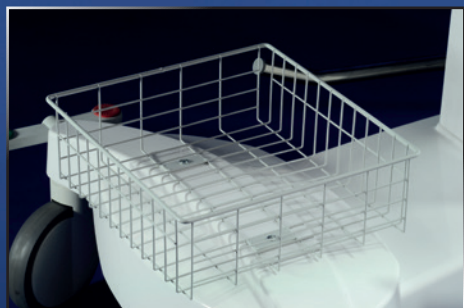

Transport table



GOLEM TRANS H

Hydraulically adjustable height of 640 – 940 mm, foot separated pedal board from both sides of the table.

Code Nr. G 11 01

GOLEM TRANS P

Braked wheels Ø 100 mm, fixed height 700 mm (or different by request).

Code Nr. G 11 02

Accessories:

Removable mattress

Fastening strap for the patient

Code Nr. D 11 01

Code Nr. D 11 02